



# SUNRISE SOLARTECH CO., LTD


ADD: No.65-22 Xinggang Road, Zhonglou Development Zone,  
Changzhou 213023 Jiangsu Province, China

TEL: 0086-519-83906502

FAX: 0086-519-83906508

## SUNRISE SOLAR MODULE DATA SHEET

### SRM-180D

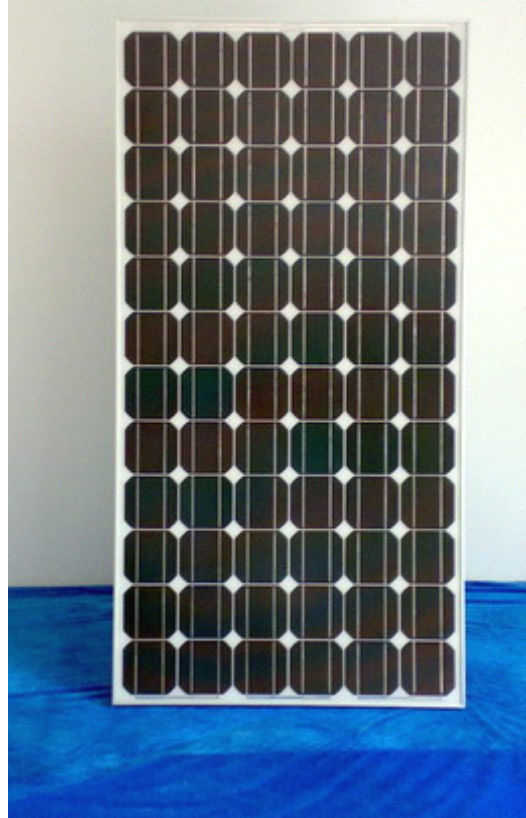

#### I : Typical Electrial Characteristics

Peak Power(Pm)	180 W
Short Circuit Current(Isc)	5.36 A
Open Circuit Voltage(Voc)	44.2 V
Maximum Power Current(Imp)	4.97 A
Maximum Power Voltage(Vmp)	36.2V
Temperature coefficient of Isc( $\alpha$ )	0.09 %/°C
Temperature coefficient of Voc ( $\beta$ )	-0.34 %/°C
Temperature coefficient of Pmax ( $\gamma$ )	-0.37 %/°C
Maximum System Voltage	DC700 V

**Standard Test Conditions(STC): 1000W/m<sup>2</sup> AM1.5 25°C**



# SUNRISE SOLARTECH CO., LTD


ADD: No.65-22 Xinggang Road, Zhonglou Development Zone,  
Changzhou 213023 Jiangsu Province, China

TEL: 0086-519-83906502 FAX: 0086-519-83906508

## II: Physical Characters

Number of Cells	72 cells in series
Cell Dimension	Monocrystalline silicon solar cells (125×125mm)
Module Net Weight	16.5(Kg)
Module Size	1581X809X48(mm)
Carton Size	1620X840X120(mm)
Packing Configuration	2pcs/carton 20cartons/pallet
Loading Capacity	280pcs/7pallets/20'container 560pcs/14pallets/40'container

## III: Drawing

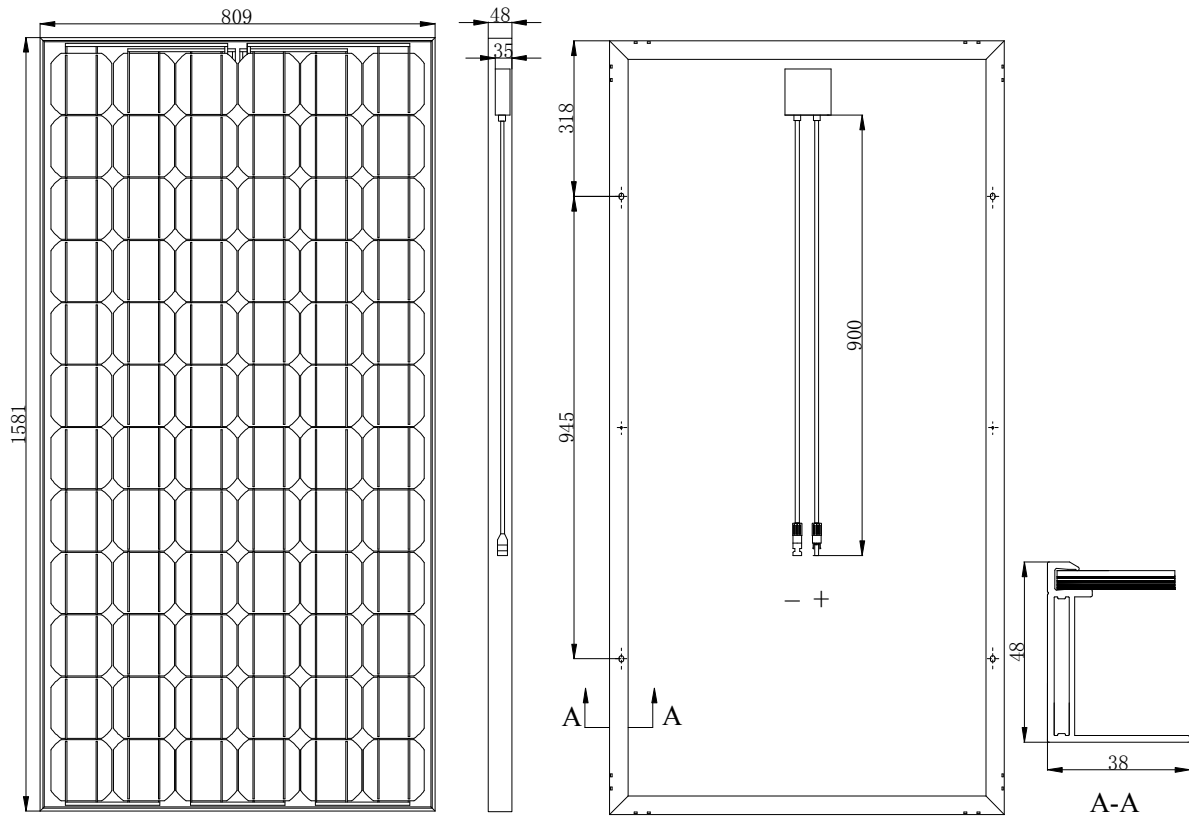



# SUNRISE SOLARTECH CO., LTD

ADD: No.65-22 Xinggang Road, Zhonglou Development Zone,  
Changzhou 213023 Jiangsu Province, China

TEL: 0086-519-83906502 FAX: 0086-519-83906508

## IV: I-V Curve

